


# GDR

# SERIES

## GAS DELIVERY REGULATOR 1/4" - 1" NPT, BSPT Spring Reference & Pilot Operated



**STANDARD CONFIGURATION**

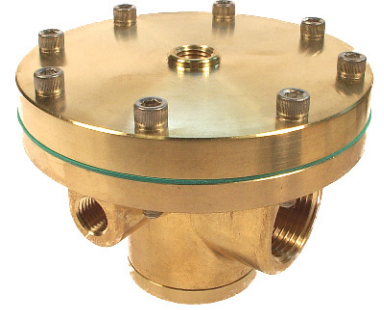

**PILOT OPERATED (DOME LOADED)**



**PIPE-A-WAY CHAMBER**



**PANEL MOUNTED**

### Description

The GDR Series Regulator provides reliable, precise pressure control in the most demanding applications. Optimized Venturi and spring design assures high flow with extremely low droop characteristics. Solid non-tied diaphragm and all brass construction guarantees leak free long lasting performance. Fully balanced design virtually eliminates outlet pressure fluctuations due to inlet pressure variations. All GDR Series regulators are 100% factory tested. d

### Features

- Fully Balanced Design maintains a constant delivery pressure regardless of inlet pressure fluctuations
- Fully Supported, Solid, Non-Tied Diaphragm for long leak free service life
- Flow Rates to 20,000 SCFH
- Optimized Spring Design and Unique Venturi Tube allows for high flow rates with minimal pressure droop effect
- Pilot Operated (dome loaded) Configuration maintains virtually constant outlet pressures
- Vent Chamber to Stack with Pipe-a-Way Option
- Side Venting Chamber option prevents moisture accumulation when mounted horizontally
- Cleaned and Packaged for Oxygen Service


*Note: Regulators supplied with Nitrile Seals are not Cleaned and Packaged for Oxygen Service.*

### Materials of Construction


- Forged Brass Body and Spring Chamber ASTM B283 or EN 12165
- Brass Adjustment Screw, Valve, Valve Stem, Spring Button, Spring Retainer and Venturi Tube ASTM B16
- 303 Stainless Steel Chamber Insert ASTM A276
- Color Coded, Chrome Vanadium Adjustment Springs ASTM A231
- 302 Stainless Steel Valve Spring ASTM A313
- GLT Fluoroelastomer (FKM), EPDM, or Nitrile on Nylon Diaphragm
- GLT Fluoroelastomer (FKM), EPDM, or Nitrile Seats and Seals
- Stainless Steel Trim (Flange Screws and Lock Nut)

*Note: EPDM seals recommended for CO<sub>2</sub> service. Nitrile Seals recommended for NG service.*

# GAS DELIVERY REGULATOR

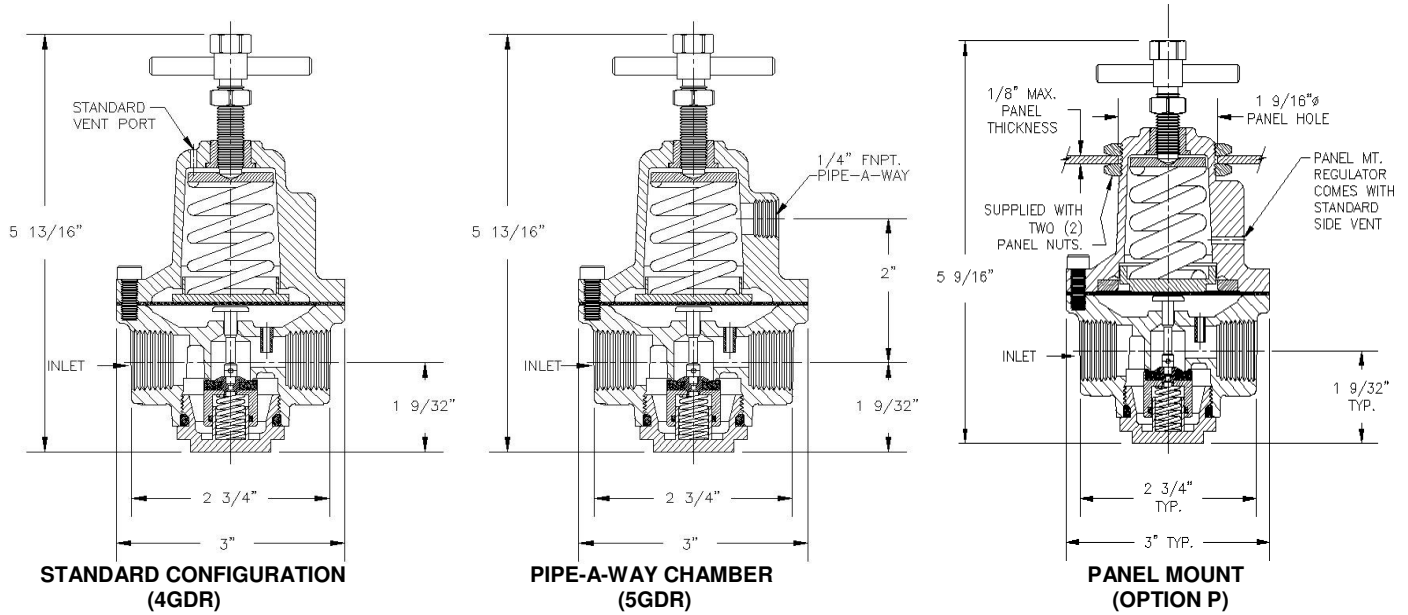

### GDR-500 Flow Curve

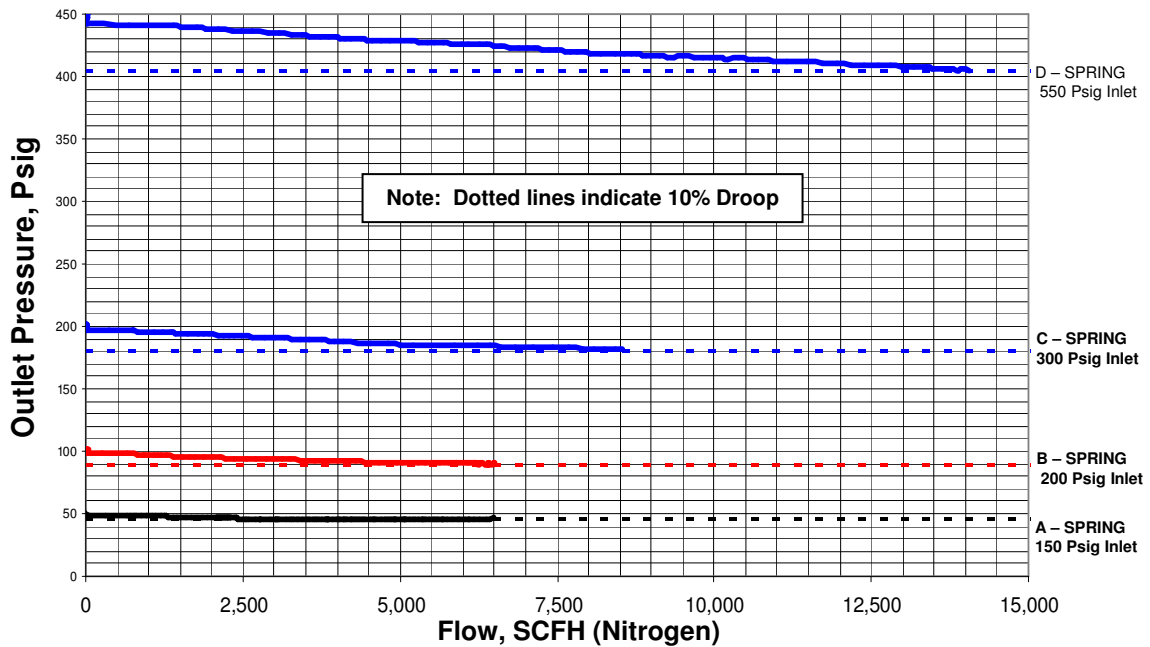

## Technical Data (GDR-500)


Maximum Inlet Pressure: 550 Psig (37.9 Bar)  
 Effect of Inlet Pressure Variation: < 0.25 Psig/100 Psig

Fail Open Flow Coefficient	Cv
1/4" NPT and BSPT	1.6
3/8" NPT	2.4
1/2" NPT and BSPT	2.9


Pressure Ranges	
Spring Model Code	Outlet Pressure Range
A (Black)	0 - 55 Psig (0 - 3.8 Bar)
B (Red)	50 - 135 Psig (3.5 - 9.3 Bar)
C (Blue)	125 - 225 Psig (8.6 - 15.5 Bar)
D (Blue)	225 - 450* Psig (15.5 - 31.0 Bar)

Notes:  
 A, B and C Range Springs are interchangeable  
 D Range spring utilizes dedicated Chamber, Chamber Ring and Spring Retainer  
 \*D Range Rated to 450 PSIG at 100 °F

# GAS DELIVERY REGULATOR

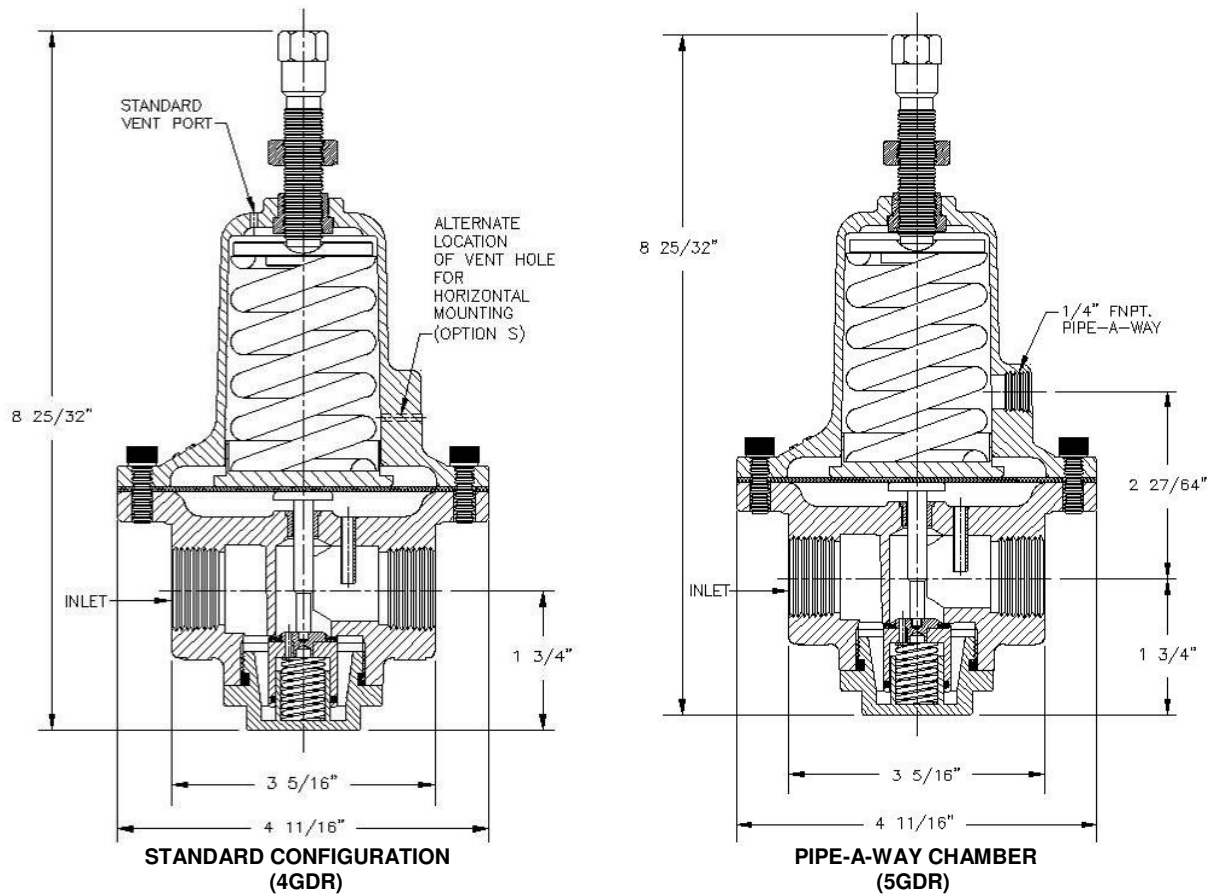

**GDR-1000 Flow Curve**

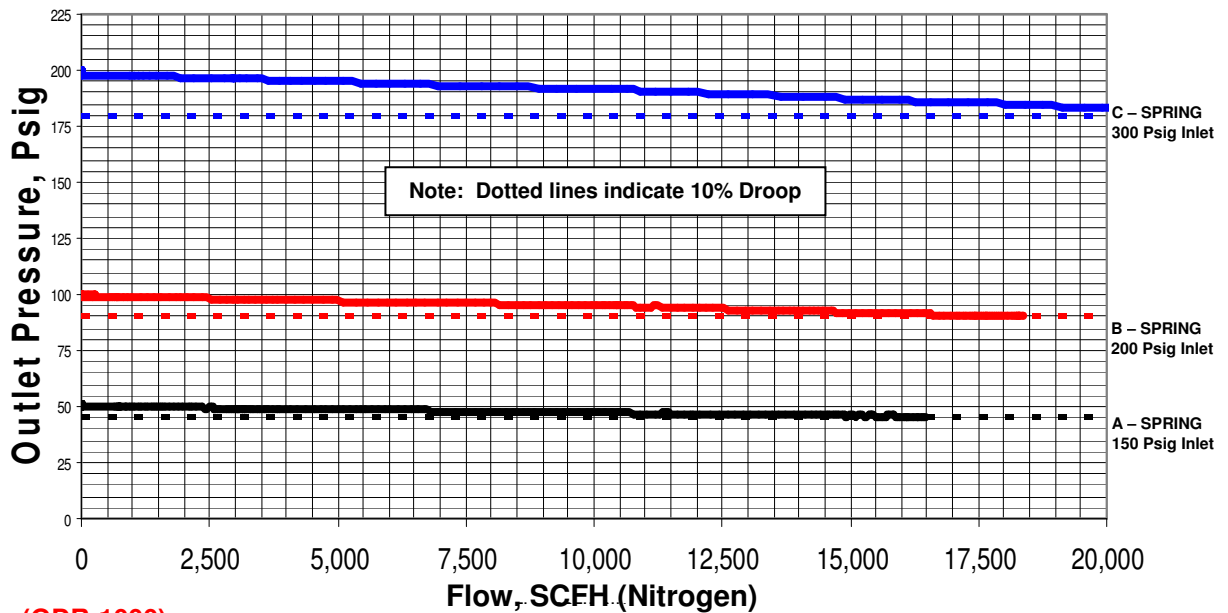


**Technical Data (GDR-1000)**

Maximum Inlet Pressure: 400 Psig (27.6 Bar)  
 Effect of Inlet Pressure Variation: < 0.25 Psig/100 Psig  
 Fail Open Flow Coefficient (3/4 and 1"): 5.8 Cv

Pressure Ranges	
Spring Model Code	Outlet Pressure Range
A (Black)	0 - 55 Psig (0 - 3.8 Bar)
B (Red)	50 - 135 Psig (3.5 - 9.3 Bar)
C (Blue)	125 - 225 Psig (8.6 - 15.5 Bar)


Notes: A, B and C Range Springs are interchangeable

# GAS DELIVERY REGULATOR

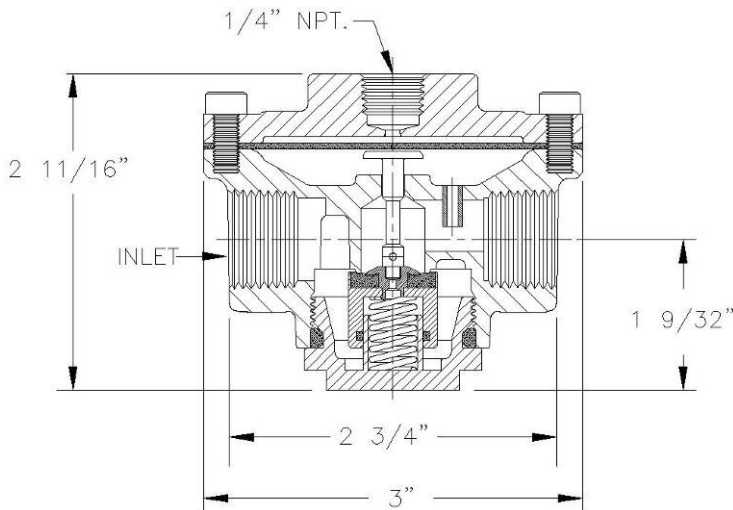

**GDR-500, Pilot Operated**

Maximum Pilot Pressure: 450 Psig (31.0 Bar) @ 100°F  
 Maximum Usable Cv: 1.5  
 Pilot Pressure to Outlet Pressure Ratio: 1 : 0.95  
 (100 Psig Pilot Pressure = 95 Psig Outlet Pressure)

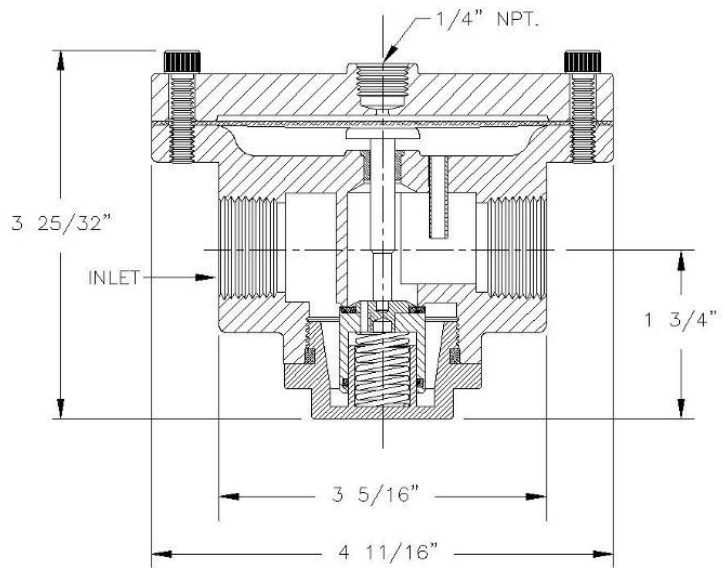


**GDR-1000, Pilot Operated**

Maximum Pilot Pressure: 250 Psig (17.2 Bar) @ 140°F  
 Maximum Usable Cv: 2.7  
 Pilot Pressure to Outlet Pressure Ratio: 1 : 0.90  
 (100 Psig Pilot Pressure = 90 Psig Outlet Pressure)

**Pilot Operated Regulators fail closed on loss of pilot pressure. Regulators fail open on loss of outlet pressure when pilot pressure is present.**

## How To Order

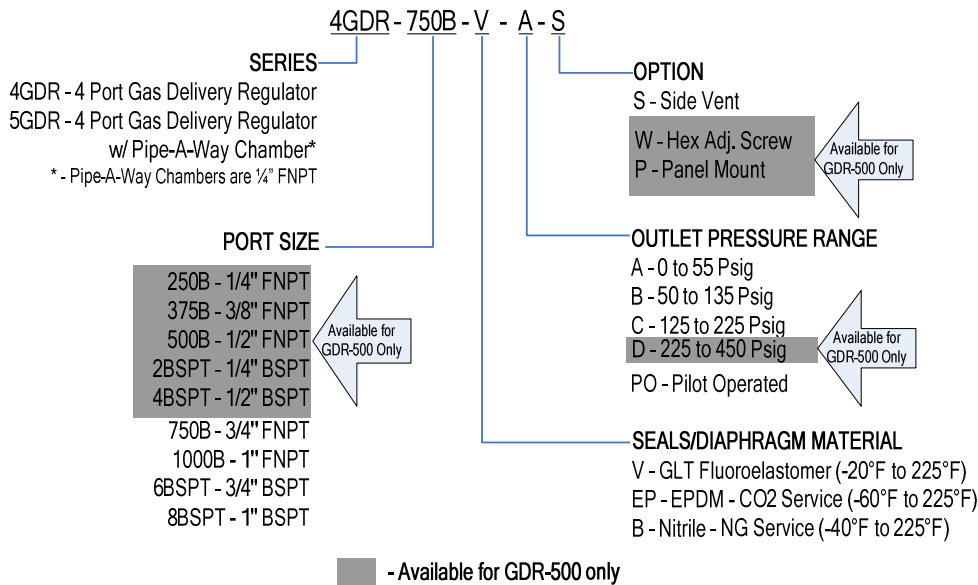

## Repair Kits

Includes: Valve Stem, Diaphragm, Valve Assembly, Valve Spring and Bottom Plug O-Ring

Model Size	Seal Material	Specify
1/4", 3/8" & 1/2"	FKM	GDR-RK-1V
	EPDM	GDR-RK-1EP
	Nitrile	GDR-RK-1B
3/4" & 1"	FKM	GDR-RK-2V
	EPDM	GDR-RK-2EP
	Nitrile	GDR-RK-2B

\*-FKM and EPM Kits are cleaned for Oxygen Service.

## Replacement Spring Kits

Includes: Spring (3/4" & 1" kit includes corresponding spring retainer)

Model Size	Specify
1/4", 3/8" & 1/2"	GDR-SK-1-*
3/4" & 1"	GDR-SK-2-*

\*-Specify Spring Model Code: A, B, C, or D

**Note:**  
**All Regulators are supplied with 2 (two) 1/4" NPT Pipe Plugs. Pipe plugs are supplied finger tight.**  
**Final installation is the responsibility of the end user.**

PROPER COMPONENT SELECTION – When specifying a component, the total system design must be considered to ensure safe and trouble-free performance. Intended component function, materials compatibility, pressure ratings, installation, environment and maintenance are the responsibility of the system designer.



**1865 Route 23 South PO Box 768 Butler, New Jersey 07405 973.838.6500 Fax 973.838.4888**